



RYTLE BOX


Type: for MovR3




Front view



Back view

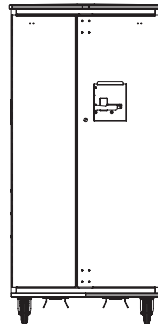

Side view

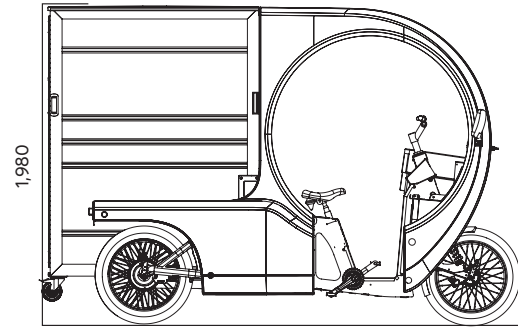

Side view: Box attached to MovR3

Technical Description

Robust exchangeable aluminium box for MovR3 loading bay

Internal dimensions designed for use with Euro pallets and Euro containers

Rear doors with high opening angle approx. 100 degrees, locking in open position

Welded tubular frame construction, floor accessible

Roof edged for rain drainage, box splashproof

Walls beaded for stiffening and sound insulation

Replaceable protective buffers at top and bottom

4 x smooth-running castors Ø 125 mm, 2 including brakes

4 x recessed grips on the sides

RFID lock with opening chip key (optional: with wristband)

Painting in RAL Classic colours according to customer requirements

Full foiling on request (digital print, 4-colour)

Technical Data

Type	Aluminium box for MovR3	Usable Volume	1,600 m ³
Tare weight	77 kg (unpainted)	Payload	180 kg
Length	1,345 mm	Inner Length	1,275 - 1,296 mm
Width	890 mm	Inner Width	808 mm
Height	1,863 mm Box; attached to MovR3: 1,980 mm	Inner Height	1,562 mm
Lock	XLOCK 40, 125 kHz Battery: 2 x CR 123 A button cell		